

# Flexible Indexing with Postgres

BRUCE MOMJIAN



Postgres offers a wide variety of indexing structures, and many index lookup methods with specialized capabilities. This talk explores the many Postgres indexing options. *Includes concepts from Teodor Sigaev, Alexander Korotkov, Oleg Bartunov, Jonathan Katz*

<https://momjian.us/presentations>



*Creative Commons Attribution License*

*Last updated: July 2025*

# Outline

1. Traditional indexing
2. Expression indexes
3. Partial indexes
4. Benefits of bitmap index scans
5. Non-B-tree index types
6. Data type support for index types
7. Index usage summary

# 1. Traditional Indexing



<https://www.flickr.com/photos/ogimogi/>

# B-Tree

- Ideal for looking up unique values and maintaining unique indexes
- High concurrency implementation
- Index is key/row-pointer, key/row-pointer
- Supply ordered data for queries
  - ORDER BY clauses (and LIMIT)
  - Merge joins
  - Nested loop with index scans

## But I Want More!

- Index expressions/functions
- Index row selectivity
- Small, light-weight indexes
- Index non-linear data
- Closest-match searches
- Index data with many duplicates
- Index multi-valued fields

## 2. Expression Indexes

```
SELECT * FROM customer WHERE lower(name) = 'andy';
```

```
CREATE INDEX i_customer_name ON customer (name); ×
```

```
CREATE INDEX i_customer_lower ON customer (lower(name));
```

# Let's Test It

```
CREATE TABLE customer (name) AS  
SELECT 'cust' || i  
FROM generate_series(1, 1000) AS g(i);
```

```
CREATE INDEX i_customer_name ON customer (name);
```

```
EXPLAIN SELECT * FROM customer WHERE name = 'cust999';  
QUERY PLAN
```

---

```
Index Only Scan using i_customer_name on customer (cost=0.28..8.29 rows=1 width=7)  
Index Cond: (name = 'cust999'::text)
```

```
EXPLAIN SELECT * FROM customer WHERE lower(name) = 'cust999';  
QUERY PLAN
```

---

```
Seq Scan on customer (cost=0.00..20.00 rows=5 width=7)  
Filter: (lower(name) = 'cust999'::text)
```

# Create an Expression Index

```
CREATE INDEX i_customer_lower ON customer (lower(name));
```

```
EXPLAIN SELECT * FROM customer WHERE lower(name) = 'cust999';  
QUERY PLAN
```

---

```
Bitmap Heap Scan on customer (cost=4.31..9.66 rows=5 width=7)  
  Recheck Cond: (lower(name) = 'cust999'::text)  
-> Bitmap Index Scan on i_customer_lower (cost=0.00..4.31 rows=5 width=0)  
    Index Cond: (lower(name) = 'cust999'::text)
```

## Other Expression Index Options

- User-defined functions
- Concatenation of columns
- Math expressions
- Only IMMUTABLE functions can be used
- Consider casting when matching WHERE clause expressions to the indexed expression

### 3. Partial Indexes: Index Row Control

- Why index every row if you are only going to look up some of them?
- Smaller index on disk and in memory
- More shallow index
- Less INSERT/UPDATE index overhead
- Sequential scan still possible

# Partial Index Creation

```
ALTER TABLE customer ADD COLUMN state CHAR(2);
```

```
UPDATE customer SET state = 'AZ'  
WHERE name LIKE 'cust9__';
```

```
CREATE INDEX i_customer_state_az ON customer (state) WHERE state = 'AZ';
```

# Test the Partial Index

```
EXPLAIN SELECT * FROM customer WHERE state = 'PA';  
QUERY PLAN
```

---

```
Seq Scan on customer (cost=0.00..17.50 rows=5 width=19)  
Filter: (state = 'PA'::bpchar)
```

```
EXPLAIN SELECT * FROM customer WHERE state = 'AZ';  
QUERY PLAN
```

---

```
Bitmap Heap Scan on customer (cost=4.17..9.50 rows=5 width=19)  
Recheck Cond: (state = 'AZ'::bpchar)  
-> Bitmap Index Scan on i_customer_state_az (cost=0.00..4.17 rows=5 width=0)
```

## Partial Index With Different Indexed Column

```
DROP INDEX i_customer_name;
```

```
CREATE INDEX i_customer_name_az ON customer (name) WHERE state = 'AZ';
```

```
EXPLAIN SELECT * FROM customer WHERE name = 'cust975';
```

```
QUERY PLAN
```

```
-----  
Seq Scan on customer (cost=0.00..17.50 rows=1 width=19)
```

```
  Filter: (name = 'cust975'::text)
```

# Partial Index With Different Indexed Column

```
EXPLAIN SELECT * FROM customer  
WHERE name = 'cust975' AND state = 'AZ';
```

QUERY PLAN

---

```
Index Scan using i_customer_name_az on customer (cost=0.14..8.16 rows=1 width=19)  
Index Cond: (name = 'cust975'::text)
```

```
EXPLAIN SELECT * FROM customer  
WHERE state = 'AZ';
```

QUERY PLAN

---

```
Bitmap Heap Scan on customer (cost=4.17..9.50 rows=5 width=19)  
Recheck Cond: (state = 'AZ'::bpchar)  
-> Bitmap Index Scan on i_customer_name_az (cost=0.00..4.17 rows=5 width=0)
```

## 4. Benefits of Bitmap Index Scans

- Used when:
  - an index lookup might generate multiple hits on the same heap (data) page
  - using multiple indexes for a single query is useful
- Creates a bitmap of matching entries in memory
- Row or block-level granularity
- Bitmap allows heap pages to be visited only once for multiple matches
- Bitmap can merge the results from several indexes with AND/OR filtering
- Automatically enabled by the optimizer

# Bitmap Index Scan

**Index 1**    **Index 2**    **Combined**  
**col1 = 'A'**   **col2 = 'NS'**   **Index**

0
1
0
1

&

0
1
1
0

=

0
1
0
0

**Table**

'A' AND 'NS'



## 5. Non-B-Tree Index Types



<https://www.flickr.com/photos/archeon/>

## Block-Range Index (BRIN)

- Tiny indexes designed for large tables
- Minimum/maximum values stored for a range of blocks (default 1MB, 128 8k pages)
- Allows skipping large sections of the table that cannot contain matching values
- Ideally for naturally-ordered tables, e.g., insert-only tables are chronologically ordered
- Index is 0.003% the size of the heap
- Indexes are inexpensive to update
- Index every column at little cost
- Slower lookups than B-tree

# Generalized Inverted Index (GIN)

- Best for indexing values with many keys or values, e.g.,
  - text documents
  - JSON
  - multi-dimensional data, arrays
- Ideal for columns containing many duplicates
- Optimized for multi-row matches
- Key is stored only once
- Index is key/many-row-pointers
- Index updates are batched, though always checked for accuracy
- Compression of row pointer list
- Optimized multi-key filtering

# Generalized Search Tree (GIST)

GIST is a general indexing framework designed to allow indexing of complex data types with minimal programming. Supported data types include

- geometric types
- range types
- hstore (key/value pairs)
- intarray (integer arrays)
- pg\_trgm (trigrams)

Supports optional “distance” for nearest-neighbors/closest matches. (GIN is also generalized.)

# Space-Partitioned Generalized Search Tree (SP-GIST)

- Similar to GIST in that it is a generalized indexing framework
- Allows the key to be split apart (decomposed)
- Parts are indexed hierarchically into partitions
- Partitions are of different sizes
- Each child needs to store only the child-unique portion of the original value because each entry in the partition shares the same parent value.

# Hash Indexes

- Equality, non-equality lookups; no range lookups

# I Am Not Making This Up

```
SELECT amname, obj_description(oid, 'pg_am')  
FROM pg_am ORDER BY 1;
```

amname	obj_description
brin	block range index (BRIN) access method
btree	b-tree index access method
gin	GIN index access method
gist	GiST index access method
hash	hash index access method
spgist	SP-GiST index access method

# Index Type Summary

- B-tree is ideal for unique values
- BRIN is ideal for the indexing of many columns
- GIN is ideal for indexes with many duplicates
- SP-GIST is ideal for indexes whose keys have many duplicate prefixes
- GIST for everything else

## 6. Data Type Support for Index Types



<https://www.flickr.com/photos/jonobass/>

## Finding Supported Data Types - B-Tree

```
SELECT opfname FROM pg_opfamily, pg_am
WHERE opfmethod = pg_am.oid AND amname = 'btree'
ORDER BY 1;
```

```
abstime_ops          jsonb_ops            text_ops
array_ops            macaddr_ops         text_pattern_ops
bit_ops              money_ops            tid_ops
bool_ops             name_ops             time_ops
bpchar_ops           network_ops          timetz_ops
bpchar_pattern_ops  numeric_ops          tinterval_ops
bytea_ops            oid_ops              tsquery_ops
char_ops             oidvector_ops        tsvector_ops
datetime_ops         pg_lsn_ops           uuid_ops
enum_ops             range_ops            varbit_ops
float_ops            record_image_ops
integer_ops          record_ops
interval_ops         relltime_ops
```

These data types are mostly single-value and easily ordered. B-tree support for multi-valued types like tsvector is only for complete-field equality comparisons.

# Finding Supported Data Types - BRIN

```
SELECT opfname FROM pg_opfamily, pg_am
WHERE opfmethod = pg_am.oid AND amname = 'brin'
ORDER BY 1;
```

abstime_minmax_ops	interval_minmax_ops	reltime_minmax_ops
bit_minmax_ops	macaddr_minmax_ops	text_minmax_ops
box_inclusion_ops	name_minmax_ops	tid_minmax_ops
bpchar_minmax_ops	network_inclusion_ops	time_minmax_ops
bytea_minmax_ops	network_minmax_ops	timetz_minmax_ops
char_minmax_ops	numeric_minmax_ops	uuid_minmax_ops
datetime_minmax_ops	oid_minmax_ops	varbit_minmax_ops
float_minmax_ops	pg_lsn_minmax_ops	
integer_minmax_ops	range_inclusion_ops	

## Finding Supported Data Types - GIN

```
SELECT opfname FROM pg_opfamily, pg_am
WHERE opfmethod = pg_am.oid AND amname = 'gin'
ORDER BY 1;
```

```
    opfname
-----
array_ops
jsonb_ops
jsonb_path_ops
tsvector_ops
```

These data types are multi-value, where each value is independent.

## Finding Supported Data Types - GIST

```
SELECT opfname FROM pg_opfamily, pg_am
WHERE opfmethod = pg_am.oid AND amname = 'gist'
ORDER BY 1;
```

```
   opfname
-----
box_ops
circle_ops
jsonb_ops
network_ops
point_ops
poly_ops
range_ops
tsquery_ops
tsvector_ops
```

These data types are multi-value — some have independent values (JSON, tsvector), others have dependent values (point, box).

## Finding Supported Data Types - SP-GIST

```
SELECT opfname FROM pg_opfamily, pg_am
WHERE opfmethod = pg_am.oid AND amname = 'spgist'
ORDER BY 1;
```

```
      opfname
-----
kd_point_ops
quad_point_ops
range_ops
text_ops
```


For text, this is useful when the keys are long.

# Index Type Examples



<https://www.flickr.com/photos/samcatchesides/>

# B-Tree

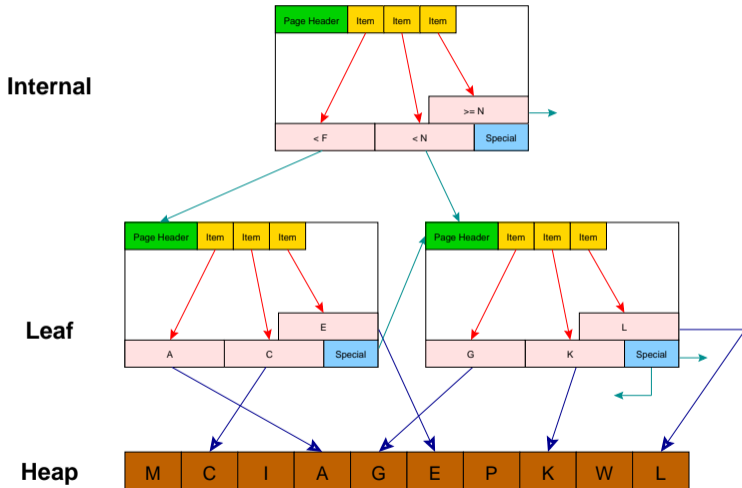

## BRIN Example

```
CREATE TABLE brin_example AS  
SELECT generate_series(1,100000000) AS id;
```

```
CREATE INDEX btree_index ON brin_example(id);  
CREATE INDEX brin_index ON brin_example USING brin(id);
```

```
SELECT relname, pg_size_pretty(pg_relation_size(oid))  
FROM pg_class  
WHERE relname LIKE 'brin_%' OR relname = 'btree_index'  
ORDER BY relname;
```

relname	pg_size_pretty
brin_example	3457 MB
btree_index	2142 MB
brin_index	104 kB

## GIN Example Using tsvector\_ops

```
CREATE TABLE articles (doc TSVECTOR);
```

```
INSERT INTO articles VALUES ('The fox is sick');
```

```
INSERT INTO articles VALUES ('How sick is this');
```

```
SELECT ctid, * FROM articles ORDER BY 1;
```

ctid	doc
(0,1)	'The' 'fox' 'is' 'sick'
(0,2)	'How' 'is' 'sick' 'this'

## GIN Example Using tsvector\_ops

```
SELECT ctid, * FROM articles ORDER BY 1;
```

ctid	doc
(0,1)	'The' 'fox' 'is' 'sick'
(0,2)	'How' 'is' 'sick' 'this'

fox	(0,1)
is	(0,1), (0,2)
sick	(0,1), (0,2)
this	(0,2)
How	(0,2)
The	(0,1)

Integer arrays are indexed similarly.

## GIN Example Using JSONB

```
CREATE TABLE webapp (doc JSONB);
```

```
INSERT INTO webapp VALUES  
('{"name": "Bill", "active": true}');
```

```
INSERT INTO webapp VALUES  
('{"name": "Jack", "active": true}');
```

```
SELECT ctid, * FROM webapp ORDER BY 1;
```

ctid	doc
(0,1)	{"name": "Bill", "active": true}
(0,2)	{"name": "Jack", "active": true}

## GIN Example Using jsonb\_ops (default)

```
(0,1) | {"name": "Bill", "active": true}
(0,2) | {"name": "Jack", "active": true}
```

```
CREATE INDEX i_webapp_yc ON webapp
USING gin (doc /* jsonb_ops */);
```

```
active (0,1), (0,2)
name   (0,1), (0,2)
true   (0,1), (0,2)
Bill   (0,1)
Jack   (0,2)
```

## GIN Example Using jsonb\_path\_ops

```
(0,1) | {"name": "Bill", "active": true}  
(0,2) | {"name": "Jack", "active": true}
```

```
CREATE INDEX i_webapp_doc_path ON webapp  
USING gin (doc jsonb_path_ops);
```


```
hash(active, true) (0,1), (0,2)  
hash(name, Bill)   (0,1)  
hash(name, Jack)   (0,2)
```

Nested keys have their parent keys (paths) prepended before hashing.


# GIST

- Supports data types with loosely-coupled values, like tsvector, JSONB
- Uniquely supports data types with tightly-coupled values
  - multi-dimensional types (geographic)
  - range types
  - IP network data type


# Linear Indexing




= 2




>= 2




# Multi-Dimensional

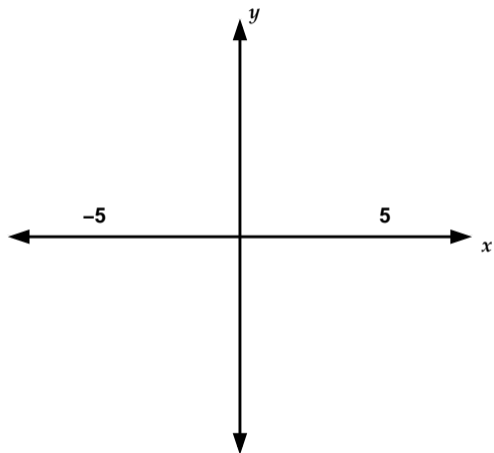

# Linear Methods Are Inefficient

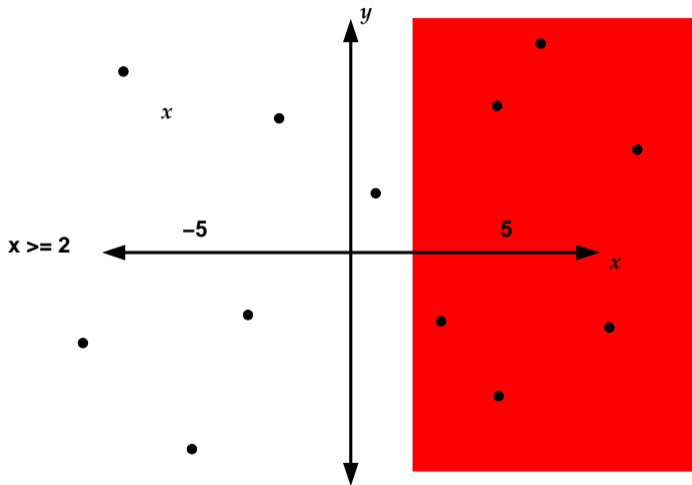

# R-Tree Indexes Bounding Boxes

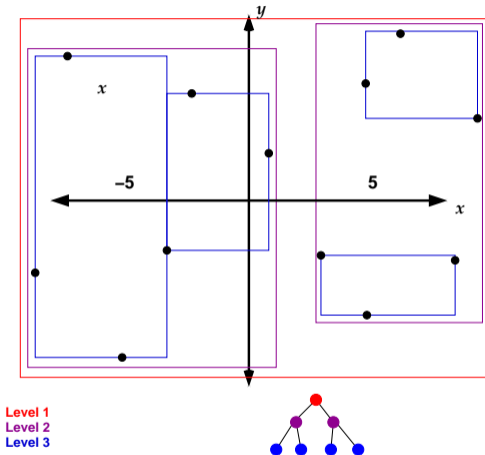

Geographic objects (lines, polygons) also can appear in R-tree indexes. based on their own bounding boxes.

# GIST Two-Dimensional Ops


box\_ops  
circle\_ops  
point\_ops  
poly\_ops

PostGIS also uses this indexing method.

## Range Indexing With GiST

GiST range-type indexing uses large ranges at the top level of the index, with ranges decreasing in size at lower levels, just like how R-tree bounding boxes are indexed.

## SP-GIST TEXT\_OPS Example (Suffix Tree)

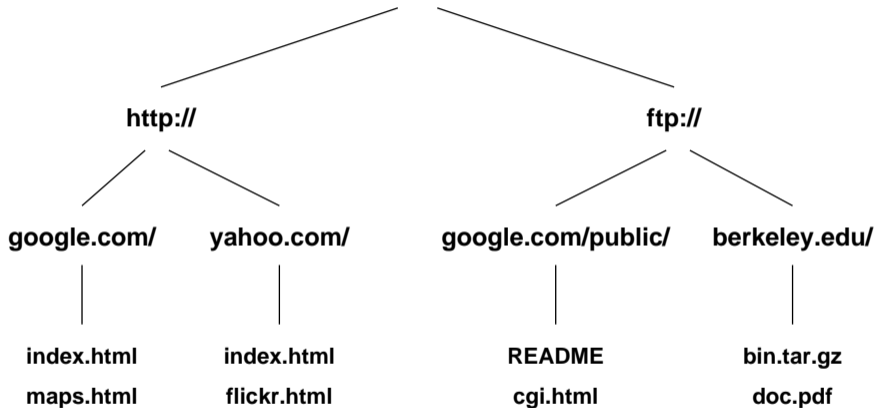

Internally split by character. B-trees use range partitioning, e.g., A–C, rather than common prefix partitioning, so a B-tree key must store the full key value.

## Other SP-GiST Index Examples

- `quad_point_ops` uses four corner points in square partitions of decreasing size
- `kd_point_ops` splits on only one dimension

# Extension Index Support

- btree\_gin (GIN)
- btree\_gist (GiST)
- cube (GiST)
- hstore (GiST, GIN)
- intarray (GiST, GIN)
- ltree (GiST)
- pg\_trgm (GiST, GIN)
- PostGIS
- seg

## 7. Index Usage Summary



<https://www.flickr.com/photos/jubilo/>

# When To Create Indexes

- `pg_stat_user_tables.seq_scan` is high
- Check frequently-executed queries with EXPLAIN (find via `pg_stat_statements` or `pgbadger`)
- Sequential scans are not always bad
- If `pg_stat_user_indexes.idx_scan` is low, the index might be unnecessary
- Unnecessary indexes use storage space and slow down INSERTs and some UPDATEs

# Evaluating Index Types

- Index build time
- Index storage size
- INSERT/UPDATE overhead
- Access speed
- Operator lookup flexibility

# Conclusion



<https://momjian.us/presentations>

[https://www.flickr.com/photos/philipp\\_zurmoehle/](https://www.flickr.com/photos/philipp_zurmoehle/)