

Secure Communication with TLS

BRUCE MOMJIAN



TLS/SSL forms the backbone of secure digital communication. This presentation explains how it works for websites and Postgres.

<https://momjian.us/presentations>



Creative Commons Attribution License

Last updated: June 2024

Outline

1. Why you should care
2. Secure digital protocol
3. Authentication
4. Browser certificate usage
5. Postgres certificate usage
6. Conclusion

1. Why You Should Care

- Interactions are increasingly digital
- Attackers are increasingly distant
- Attackers are increasingly sophisticated
- New threats prompt new security requirements
- Security software must be regularly updated to be effective

This presentation shows only modern security practices.

What Cryptography Can Accomplish

Authenticity Verify who is on the other end of the communication channel

Confidentiality Only the other party can read the original messages

Integrity No other party can change or add messages

Other features are often desired, e.g., non-repudiation.

This Talk Is Not Enough

Of course, secure digital communication is just one aspect of security. If done properly, attacks will happen somewhere else:

- Protocol attacks
- Trojan horses
- Viruses
- Electromagnetic monitoring (TEMPEST)
- Physical compromise
- Blackmail/intimidation of key holders
- Operating system bugs
- Application program bugs
- Hardware bugs
- User error
- Physical eavesdropping
- Social engineering
- Dumpster diving

(List from *Applied Cryptography*, Bruce Schneier, 1996) For an entertaining video about hardware exploits that bypass encryption, see *Crypto Won't Save You Either*, https://youtu.be/_ahcUuN04so.

2. Secure Digital Protocol

A secure digital protocol needs a way to:

- Negotiate a secret session key in public, e.g., ECDHE
- Encrypt/decrypt a block of data using a key, e.g., AES256
- Encrypt/decrypt a variable-length message, e.g., GCM
- Verify the message was generated by someone who knows the key, e.g., GCM
- Identify that the other party is authentic, e.g., RSA
- Verify someone is not in the middle viewing, modifying, or adding messages, e.g., RSA

This is not a protocol that does one thing — it must do multiple things, and with resourceful and persistent attackers intermixed at all levels of the protocol.

TLS/SSL Protocol

- SSL (Secure Socket Layers) developed by Netscape in 1995
- TLS (Transport Layer Security) approved by the IETF (Internet Engineering Task Force) in 1999
- IETF deprecated SSL 2.0 in 2011 and SSL 3.0 (the last version) in 2015 due to discovered vulnerabilities
- TLS 1.3 is the most recent version, released in August, 2018

TLS protocol details and its interaction with certificates, key exchange, and attacks are covered in <https://security.stackexchange.com/questions/20803/how-does-ssl-tls-work>. A video about the protocol message exchange is available at https://www.youtube.com/watch?v=25_ftpJ-2ME.

What *Not* To Do

- Do not encrypt the *message* using RSA
 - too slow to encrypt
 - messages can expose parts of the secret key
- Do not encrypt the *secret key* using RSA
 - post-session exposure of a persistent RSA private key would expose the message, i.e., does not allow forward secrecy
 - too slow to generate per-session RSA key pairs

Application of Cryptographic Methods

- Use ephemeral Diffie–Hellman (DHE or ECDHE) to negotiate a secret session key
- Use RSA for user authentication (more on this in the next section)
 - Server RSA-signs a *hash* of the current DHE or ECDHE exchange (*e.g.* $g^y \bmod p$) to:
 - proves identity (knowledge of the certificate's RSA private key)
 - prevents a man-in-the-middle from altering the server's DHE or ECDHE parameters
 - Client sends its DHE part (*e.g.*, $g^x \bmod p$), optionally signed (authenticated) by a client certificate
- Session tickets allow the reuse of parameters from recent sessions
- TLS 1.3 requires DHE or ECDHE key negotiation, *e.g.*, passing the key via RSA encryption is no longer supported

Pieces of the Puzzle


- ECDHE for secret key exchange
- RSA for authenticating users and the secret key
- AES for confidentiality
- GCM and SHA for integrity of encrypted blocks

Modern TLS Connection

```
$ openssl s_client -connect momjian.us:443
```

```
...
```

```
New, TLSv1.3, Cipher is TLS_AES_256_GCM_SHA384
```

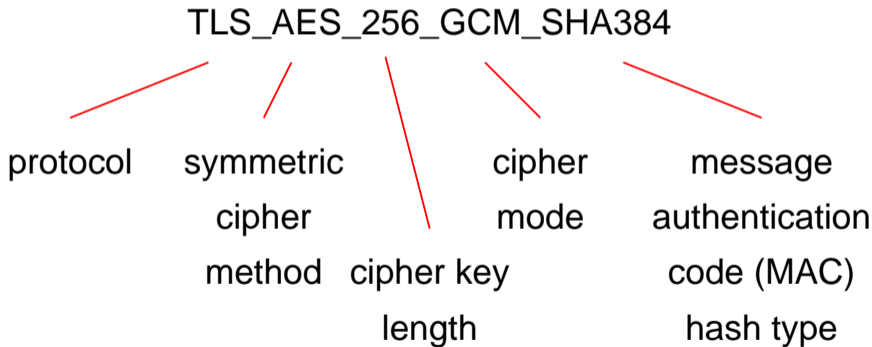


generated using OpenSSL 1.1.1k 25 Mar 2021

Cryptographic Standards Are Evolving

- Some browsers do not prefer the strongest encryption settings, e.g., Firefox 96 and Chrome 97 prefer AES128 over AES256
- Check your browser's preferred ciphers: <https://www.ssllabs.com/ssltest/viewMyClient.html>

Firefox Defaults for momjian.us

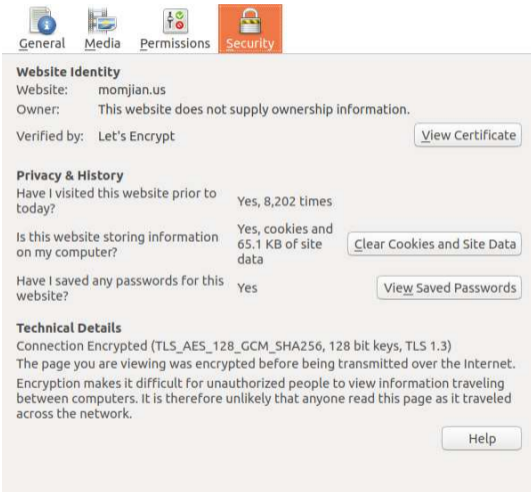

The screenshot shows the Firefox Security settings for the website momjian.us. At the top, there are four tabs: General, Media, Permissions, and Security (which is highlighted in orange). Below the tabs, the Security section is expanded, showing the following information:

- Website Identity:**
 - Website: momjian.us
 - Owner: This website does not supply ownership information.
 - Verified by: Let's Encrypt (with a [View Certificate](#) button)
- Privacy & History:**
 - Have I visited this website prior to today? Yes, 8,202 times
 - Is this website storing information on my computer? Yes, cookies and 65.1 KB of site data (with a [Clear Cookies and Site Data](#) button)
 - Have I saved any passwords for this website? Yes (with a [View Saved Passwords](#) button)
- Technical Details:**
 - Connection Encrypted (TLS_AES_128_GCM_SHA256, 128 bit keys, TLS 1.3)
 - The page you are viewing was encrypted before being transmitted over the Internet.
 - Encryption makes it difficult for unauthorized people to view information traveling between computers. It is therefore unlikely that anyone read this page as it traveled across the network.
 - (with a [Help](#) button)

Chrome Defaults for momjian.us

Security overview



This page is secure (valid HTTPS).

- Certificate - **valid and trusted**

The connection to this site is using a valid, trusted server certificate issued by R3.

[View certificate](#)

- Connection - **secure connection settings**

The connection to this site is encrypted and authenticated using TLS 1.3, X25519, and AES_128_GCM.

- Resources - **all served securely**

All resources on this page are served securely.

Elliptic Curves Are the Future

The following rows have comparable security:

Symmetric Cipher	Bits Elliptic Curve	RSA & DHE	Bit Ratio Cols 2 & 3	Computational Ratio
80	160	1024	6	262
112	224	2048	9	84
128	256	3072	12	1728
192	384	7680	20	8000
256	521	15360	29	25625

<https://www.globalsign.com/en/blog/elliptic-curve-cryptography/>

For columns two and three, doubling the bit count increases computations by 8x (cubic). The chart's asymmetry is caused by non-brute-force attacks against linear finite-field algorithms with complexity less than $O(\sqrt{n})$ (e.g., index calculus) which do not apply to elliptic curves. Simplistically, this is because, in *linear* finite fields, it is easy to find valid integers, while for elliptic curves it is difficult to find valid points (x,y) ; for ideas see <https://crypto.stackexchange.com/questions/8301/trying-to-better-understand-the-failure-of-the-index-calculus-for-ecdlp>.

Postgres TLS Introspection

```
$ psql "sslmode=require host=momjian.us dbname=postgres"
psql (14.1)
SSL connection (protocol: TLSv1.3, cipher: TLS_AES_256_GCM_SHA384, bits: 256,
compression: off)
Type "help" for help.
postgres=> CREATE EXTENSION sslinfo;

postgres=> SELECT ssl_is_used(), ssl_version(), ssl_cipher();
 ssl_is_used | ssl_version |          ssl_cipher
-----+-----+-----
 t           | TLSv1.3    | TLS_AES_256_GCM_SHA384
```

`sslinfo` also includes functions to query client certificates.

Postgres Fanciness

```
SELECT type, mode
FROM   unnest(string_to_array(ssl_cipher(), '_'),
              '{protocol, symmetric cipher method, cipher key length, cipher mode,
               MAC hash type}'::text[])
```

```
AS f(type, mode);
```

```
type | mode
```

```
-----+-----
TLS   | protocol
AES   | symmetric cipher method
256   | cipher key length
GCM   | cipher mode
SHA384 | MAC hash type
```

3. Authentication



<https://www.flickr.com/photos/93243105@N0/>

3.1 Certificates Creation: Their Purpose

So far, Diffie–Hellman (DHE and ECDHE) allow negotiation of a secret key in public, but who are you negotiating with?

- Is there someone impersonating your intended participant?
- Is there someone between you and your intended participant, passing through all the messages but:
 - viewing them?
 - modifying them?
 - creating fake messages?


While the two parties could establish a secret privately that could be used later to prove identity, the more common method is to create an X.509 certificate, which is information RSA-signed by someone that both parties trust (a certificate authority).

X.509 Certificate Creation

Create an X.509 certificate that is signed by a trusted root certificate authority:

- Create a certificate signing request (CSR) by answering some questions that uniquely identify your website
- A public and private RSA key pair will also be generated
- Email the CSR (which includes the public RSA key) to a publicly-trusted certificate authority
- Receive an X.509 certificate that is RSA-signed by a trusted entity
- Install the trusted certificate in the web server

The RSA Key and Its Signed CSR

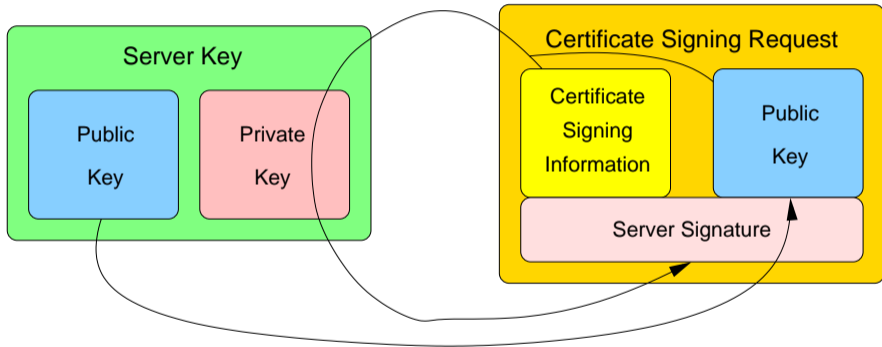

Generating a Certificate Signing Request (CSR)

```
$ openssl req -new -nodes -newkey rsa:2048 \  
    -keyout momjian.us.key -out momjian.us.csr  
Generating a 2048 bit RSA private key  
.....+++  
.....+++  
writing new private key to 'momjian.us.key'  
...fill in prompts  
Country Name (2 letter code) [AU]:  
...  
$ ls  
momjian.us.csr  momjian.us.key  
$ openssl req -in momjian.us.csr -noout -text  
Certificate Request:  
...  
Subject: C=US, ST=Pennsylvania, L=Newtown Square, O=Bruce Momjian, OU=website, \  
        CN=momjian.us/emailAddress=bruce@momjian.us
```

The Full CSR

```
$ openssl req -in momjian.us.csr -noout -text
```

```
Certificate Request:
```

```
Data:
```

```
Version: 0 (0x0)
```

```
Subject: C=US, ST=Pennsylvania, L=Newtown Square, O=Bruce Momjian, OU=website, \
        CN=momjian.us/emailAddress=bruce@momjian.us
```

```
Subject Public Key Info:
```

```
Public Key Algorithm: rsaEncryption
```

```
Public-Key: (2048 bit)
```

```
Modulus:
```

```
00:cb:33:cf:07:bf:5a:61:08:47:50:d4:6f:18:d3:
```

```
...
```

```
82:a8:11:cb:e2:a1:1a:7d:cf:92:e4:43:59:6a:d3:
```

```
25:65
```

```
Exponent: 65537 (0x10001)
```

```
Attributes:
```

```
a0:00
```

```
Signature Algorithm: sha256WithRSAEncryption
```

```
12:b1:21:09:b4:b4:3e:fe:2b:9f:ce:96:cd:98:17:80:d0:83:...
```

The CSR-Generated RSA Key Pair

```
$ openssl rsa -in momjian.us.key -text -noout
Private-Key: (2048 bit)
modulus:
  00:cb:33:cf:07:bf:5a:61:08:47:50:d4:6f:18:d3:...
publicExponent: 65537 (0x10001)

privateExponent:
  00:a0:6c:7a:9a:47:3b:f7:37:2d:f6:66:80:7f:3d:...
prime1:
  00:ff:e9:0a:97:00:2b:36:ca:dc:35:b5:f5:18:e5:...
prime2:
  00:cb:46:09:ea:00:8b:20:36:e6:69:45:e1:e2:c7:...
exponent1:
  1c:65:57:6f:79:ed:51:9f:20:e0:34:d8:85:72:bd:...
exponent2:
  59:50:c0:f2:6c:a2:b4:d8:ea:8c:bf:03:ed:9d:53:...
coefficient:
  32:ee:3b:ef:87:e4:f3:e4:ba:2e:7d:0d:51:ab:97:...
```


RSA Key Pair Internals

```
$ rsadump.sh momjian.us.key
```

```
key bits = 2047.6
```

```
n (pq) = 2565...
```

```
e = 65537
```

```
d (1/e mod lcm(p-1,q-1)) = 2025...
```

```
p = 1797...
```

```
q = 1427...
```

```
exp1 (dp, d mod (p-1)) = 1994...
```

```
exp2 (dq, d mod (q-1)) = 6271...
```

```
c (qinv, 1/q mod p) = 3576...
```

```
...
```

The final three fields are used to speed computations involving the private key. Script available at <https://momjian.us/main/writings/pgsql/rsadump.sh>, derived from http://www.vidarholen.net/contents/junk/files/decode_rsa.bash.

RSA Key Pair Internals

```
$ rsadump.sh -e momjian.us.key
key bits = 2047.6
n (pq)  $\approx$  2e616
e = 65537

d (1/e mod lcm(p-1,q-1))  $\approx$  2e616
p  $\approx$  1e308
q  $\approx$  1e308

exp1 (dp, d mod (p-1))  $\approx$  1e307
exp2 (dq, d mod (q-1))  $\approx$  6e307
c (qinv, 1/q mod p)  $\approx$  3e307
...
```

RSA and X.509 Files

Key contains the public and private keys

Pub contains the public key

Csr contains the public key and data to be signed

Crt contains the public key and data and the signature of a certificate authority

TLS/SSL Acronyms

- ASN1** Abstract syntax notation used to represent a hierarchical data structure
- DER** Binary representation of an ASN1 structure, used by *openssl* and other TLS/SSL tools
- PEM** Base64 encoding of DER data, with dashed armor before and after; typical file extensions: *pem, key, pub, csr, crt, crl*

PEM describes the storage format, not the contents, i.e., a PEM file can contain a public/private key pair, public key, certificate request, signed certificate (one or many (a chain)), or certificate revocation list.

Prove the CSR Was Signed by the RSA Private Key

- Study the ASN1 structure of the CSR
- Find the hash method, e.g., SHA256
- Hash the ASN1 section containing the user-supplied parameters
- Extract the signed stored hash in the CSR
- Use the RSA public key to reverse the signature to produce the stored hash
- Compare the computed hash with the stored hash

The ASN1 CSR Structure

```
$ openssl req -in momjian.us.csr -outform DER | openssl asn1parse -i -inform DER
```

```
...
 0:d=0  hl=4 l= 739 cons: SEQUENCE
 4:d=1  hl=4 l= 459 cons: SEQUENCE
 8:d=2  hl=2 l=   1 prim:  INTEGER           :00
11:d=2  hl=3 l= 157 cons:  SEQUENCE
...
117:d=3  hl=2 l=  19 cons:    SET
119:d=4  hl=2 l=  17 cons:    SEQUENCE
121:d=5  hl=2 l=   3 prim:    OBJECT           :commonName
126:d=5  hl=2 l=  10 prim:    UTF8STRING        :momjian.us
...
171:d=2  hl=4 l= 290 cons:  SEQUENCE
175:d=3  hl=2 l=  13 cons:  SEQUENCE
177:d=4  hl=2 l=   9 prim:  OBJECT           :rsaEncryption
188:d=4  hl=2 l=   0 prim:  NULL
190:d=3  hl=4 l= 271 prim:  BIT STRING
465:d=2  hl=2 l=   0 cons:  cont [ 0 ]
467:d=1  hl=2 l=  13 cons: SEQUENCE
469:d=2  hl=2 l=   9 prim: OBJECT           :sha256WithRSAEncryption
480:d=2  hl=2 l=   0 prim:  NULL
482:d=1  hl=4 l= 257 prim: BIT STRING
```

Hash the User-Supplied-Parameter Section

```
$ # openssl asn1parse can't process text before  
$ # the PEM armor so convert it to DER first.  
$ openssl req -in momjian.us.csr -outform DER |  
> openssl asn1parse -i -inform DER -strparse 4 -out /dev/stdout -noout |  
> openssl dgst -sha256 -binary |  
> xxd -plain -cols 999  
f405afa2d4b242ecb320071f37ba2e00b249b7fd05f91db7bc35882380e2c25e
```

Reverse the Signed Hash

```
$ openssl req -in momjian.us.csr -outform DER |
> openssl asn1parse -i -inform DER -strparse 482 -out /dev/stdout -noout |
> openssl pkeyutl -verifyrecover -inkey momjian.us.key |
> openssl asn1parse -i -inform DER
  0:d=0  hl=2 l= 49 cons: SEQUENCE
  2:d=1  hl=2 l= 13 cons: SEQUENCE
  4:d=2  hl=2 l=  9 prim: OBJECT                :sha256
 15:d=2  hl=2 l=  0 prim: NULL
 17:d=1  hl=2 l= 32 prim: OCTET STRING          [HEX DUMP]: \
F405AFA2D4B242ECB320071F37BA2E00B249B7FD05F91DB7BC35882380E2C25E
```


Extract the Reverse Signed Hash and Compare

```
$ openssl req -in momjian.us.csr -outform DER |  
> openssl asn1parse -i -inform DER -strparse 482 -out /dev/stdout -noout |  
> openssl pkeyutl -verifyrecover -inkey momjian.us.key |  
> openssl asn1parse -i -inform DER -strparse 17 -out /dev/stdout -noout |  
> xxd -plain -cols 999  
f405afa2d4b242ecb320071f37ba2e00b249b7fd05f91db7bc35882380e2c25e
```

\$ # The hash we computed earlier on the user-supplied params

```
$ openssl req -in momjian.us.csr -outform DER |  
> openssl asn1parse -i -inform DER -strparse 4 -out /dev/stdout -noout |  
> openssl dgst -sha256 -binary |  
> xxd -plain -cols 999  
f405afa2d4b242ecb320071f37ba2e00b249b7fd05f91db7bc35882380e2c25e
```

```
$ openssl req -in momjian.us.csr -verify -key momjian.us.key -noout  
verify OK
```

Website Certificate (Signed CSR)

```
$ openssl x509 -in momjian.us.pem -text -noout
```

```
Certificate:
```

```
  Data:
```

```
    Version: 3 (0x2)
```

```
    Serial Number:
```

```
      23:30:40:e9:4c:3e:b1:63:4e:15:2b:1a:e2:00:a1:01
```

```
Signature Algorithm: sha256WithRSAEncryption
```

```
Issuer: C=US, O=GeoTrust Inc., CN=RapidSSL SHA256 CA
```

```
Validity
```

```
  Not Before: Mar  3 00:00:00 2016 GMT
```

```
  Not After  : May  2 23:59:59 2018 GMT
```

```
Subject: CN=momjian.us
```

```
Subject Public Key Info:
```

```
  Public Key Algorithm: rsaEncryption
```

```
    Public-Key: (2048 bit)
```

```
...
```

3.2 Certificate Verification: Manually Verify Each Certificate Link

```
$ openssl x509 -in momjian.us.pem -subject -issuer -noout  
subject= /CN=momjian.us  
issuer= /C=US/O=GeoTrust Inc./CN=RapidSSL SHA256 CA
```

```
$ openssl x509 -in RapidSSL_SHA256_CA.pem -subject -issuer -noout  
subject= /C=US/O=GeoTrust Inc./CN=RapidSSL SHA256 CA  
issuer= /C=US/O=GeoTrust Inc./CN=GeoTrust Global CA
```

```
$ openssl x509 -in /etc/ssl/certs/GeoTrust_Global_CA.pem -subject -issuer -noout  
subject= /C=US/O=GeoTrust Inc./CN=GeoTrust Global CA  
issuer= /C=US/O=GeoTrust Inc./CN=GeoTrust Global CA
```

Verify the Certificate Chain to the Root CA

```
$ # momjian.us.pem needs two certificates to reach the root CA
$ # so we concatenate them together. -CApath /dev/null prevents
$ # the local certificate store from being used.
$ cat /etc/ssl/certs/GeoTrust_Global_CA.pem RapidSSL_SHA256_CA.pem |
> openssl verify -CApath /dev/null -CAfile /dev/stdin momjian.us.pem
momjian.us.pem: OK
```

```
$ openssl verify -CApath /dev/null -CAfile \
    /etc/ssl/certs/GeoTrust_Global_CA.pem RapidSSL_SHA256_CA.pem
RapidSSL_SHA256_CA.pem: OK
```

```
$ openssl verify -CApath /dev/null -CAfile \
    /etc/ssl/certs/GeoTrust_Global_CA.pem \
    /etc/ssl/certs/GeoTrust_Global_CA.pem
/etc/ssl/certs/GeoTrust_Global_CA.pem: OK
```

Experimenting With Verification

```
$ # Certificate order doesn't matter in this case.
```

```
$ cat RapidSSL_SHA256_CA.pem /etc/ssl/certs/GeoTrust_Global_CA.pem |  
> openssl verify -CApath /dev/null -CAfile /dev/stdin momjian.us.pem  
momjian.us.pem: OK
```

```
$ # momjian.us can't verify itself
```

```
$ openssl verify -CApath /dev/null -CAfile momjian.us.pem momjian.us.pem  
momjian.us.pem: CN = momjian.us  
error 20 at 0 depth lookup:unable to get local issuer certificate
```

```
$ # error and success with a root certificate
```

```
$ openssl verify -CApath /dev/null /etc/ssl/certs/GeoTrust_Global_CA.pem  
/etc/ssl/certs/GeoTrust_Global_CA.pem: C = US, O = GeoTrust Inc., \  
CN = GeoTrust Global CA  
error 18 at 0 depth lookup:self signed certificate  
OK
```

Rules of Certificate Verification, Part 1

These rules apply to public and private CA verification:

- Receive the first remote certificate; assume the remote server has its private key
- Receive any additional remote certificates
 - these should be intermediate certificates that create a chain toward a root certificate
 - traverse up the chain as far as possible
 - find a certificate whose subject name matches the current certificate issuer's subject name, e.g., if the certificate issuer is "RapidSSL SHA256 CA", find a certificate with that subject name
 - verify that the issuer's public key can decrypt the current certificate's signature and matches the hash of the certificate body
 - continue until no more matches or a root certificate is found

Rules of Certificate Verification, Part 2

- Using the top-most certificate found, look in the local certificate store for similar matches
 - if a root certificate was already received, check that it also exists in the local certificate store
 - if not, using the previous instructions, continue until a local-certificate-store root certificate is found, or fail

For more details, see the “Verify Operation” section of the `verify` manual page.

Installing Certificates in Apache 2.4

- Place the signed server/leaf certificate in a new file
- Append any intermediate certificates that should be sent to the client to help the traverse to a locally-stored root certificate, in reverse-signing order (for compatibility)
- You can place the new file in any directory accessible by Apache, or in `/etc/ssl/certs` (or where specified by the Apache `SSLCertificatePath` directive)
- Record the file path in `/etc/apache2/sites-enabled/000-default-ssl.conf` using the `SSLCertificateFile` directive

Introspecting a Certificate Bundle

It is possible to show all the certificates in a *certificate bundle*:

```
$ # There is no value in including the root certificate
$ # because it must exist on the remote side for success.
$ cat RapidSSL_SHA256_CA.pem momjian.us.pem > /etc/ssl/certs/momjian.us.bundle.pem

$ openssl crl2pkcs7 -nocrl -certfile momjian.us.bundle.pem |
> openssl pkcs7 -print_certs -text -noout | grep 'Subject:'
    Subject: CN=momjian.us
    Subject: C=US, O=GeoTrust Inc., CN=RapidSSL SHA256 CA
```


3.3 Certificate Authority Creation

To create a local root certificate authority and a chain underneath it:

- Create a certificate signed by its own key pair (the root CA)
- Create an intermediate CA whose certificate is signed by the root CA's private key
- Create a server certificate signed by the intermediate CA

Details about certificate creation and management can be found at <https://jamielinux.com/docs/openssl-certificate-authority/introduction.html>.

Root CA, Intermediate CA, and Server Certificate



Create the Root CA

```
$ openssl req -new -nodes -subj "/CN=CA-root" -text -keyout CA-root.key > CA-root.csr
```

```
$ # v3_ca enables a group of settings from the openssl config file;
```

```
$ # specifically, it sets the certificate's basic constraint of
```

```
$ # CA to true. -extfile points to the config file
```

```
$ openssl x509 -req -in CA-root.csr -text -days 3650 \  
-extfile /etc/ssl/openssl.cnf -extensions v3_ca \  
-signkey CA-root.key > CA-root.crt
```

Certificate Marked as a CA


```
$ openssl x509 -in CA-root.crt -text -noout
Certificate:
  Data:
    Version: 3 (0x2)
    Serial Number:
      9e:40:f6:e3:7c:e8:94:ec
    Signature Algorithm: sha256WithRSAEncryption
    Issuer: CN=CA-root
    ...
    X509v3 Basic Constraints:
      CA:TRUE
```

Create the Intermediate CA

```
$ openssl req -new -nodes -subj "/CN=CA-intermediate" -text \  
-keyout CA-intermediate.key > CA-intermediate.csr
```

```
$ openssl x509 -req -in CA-intermediate.csr -text -days 1825 \  
-extfile /etc/ssl/openssl.cnf -extensions v3_ca \  
-CA CA-root.crt -CAkey CA-root.key -CAcreateserial \  
> CA-intermediate.crt
```

CA Signing the CSR

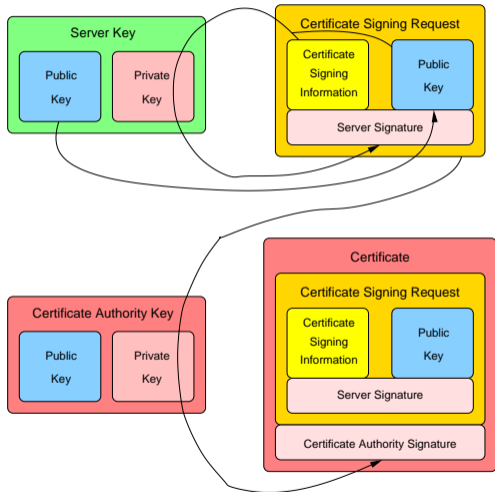

Proving the Certificate Signature

```
$ # Get offsets of user-supplied parameter section
$ openssl x509 -in CA-intermediate.crt -outform DER | openssl asn1parse -i -inform DER
  0:d=0  hl=4 l= 767 cons: SEQUENCE
    4:d=1  hl=4 l= 487 cons: SEQUENCE
      ...
    39:d=2  hl=2 l=  18 cons: SEQUENCE
    41:d=3  hl=2 l=  16 cons: SET
    43:d=4  hl=2 l=  14 cons: SEQUENCE
    45:d=5  hl=2 l=   3 prim: OBJECT          :commonName
    50:d=5  hl=2 l=   7 prim: UTF8STRING      :CA-root
      ...
    91:d=2  hl=2 l=  26 cons: SEQUENCE
    93:d=3  hl=2 l=  24 cons: SET
    95:d=4  hl=2 l=  22 cons: SEQUENCE
    97:d=5  hl=2 l=   3 prim: OBJECT          :commonName
   102:d=5  hl=2 l=  15 prim: UTF8STRING      :CA-intermediate
      ...
  495:d=1  hl=2 l=  13 cons: SEQUENCE
  497:d=2  hl=2 l=   9 prim: OBJECT          :sha256WithRSAEncryption
  508:d=2  hl=2 l=   0 prim: NULL
  510:d=1  hl=4 l= 257 prim: BIT STRING
```


Hash the User-Supplied-Parameter Section

```
$ openssl x509 -in CA-intermediate.crt -outform DER |  
> openssl asn1parse -i -inform DER -strparse 4 -out /dev/stdout -noout |  
> openssl dgst -sha256 -binary |  
> xxd -plain -cols 999  
9b7a02bdaff1412c5843b812255cbd023b1c6f6ae1ac3b93cd3d5fd001e0bc21
```

Reverse the Signed Hash

```
$ openssl x509 -in CA-intermediate.crt -outform DER |
> openssl asn1parse -i -inform DER -strparse 510 -out /dev/stdout -noout |
> openssl pkeyutl -verifyrecover -inkey CA-root.key |
> openssl asn1parse -i -inform DER
  0:d=0  hl=2 l= 49 cons: SEQUENCE
  2:d=1  hl=2 l= 13 cons: SEQUENCE
  4:d=2  hl=2 l=  9 prim: OBJECT                :sha256
 15:d=2  hl=2 l=  0 prim: NULL
 17:d=1  hl=2 l= 32 prim: OCTET STRING          [HEX DUMP]: \
9B7A02BDAFF1412C5843B812255CBD023B1C6F6AE1AC3B93CD3D5FD001E0BC21
```

Extract the Reverse Signed Hash and Compare

```
$ openssl x509 -in CA-intermediate.crt -outform DER |  
> openssl asn1parse -i -inform DER -strparse 510 -out /dev/stdout -noout |  
> openssl pkeyutl -verifyrecover -inkey CA-root.key |  
> openssl asn1parse -i -inform DER -strparse 17 -out /dev/stdout -noout |  
> xxd -plain -cols 999  
9b7a02bdaff1412c5843b812255cbd023b1c6f6ae1ac3b93cd3d5fd001e0bc21
```

```
$ # The hash we computed earlier on the user-supplied params  
$ openssl x509 -in CA-intermediate.crt -outform DER |  
> openssl asn1parse -i -inform DER -strparse 4 -out /dev/stdout -noout |  
> openssl dgst -sha256 -binary |  
> xxd -plain -cols 999  
9b7a02bdaff1412c5843b812255cbd023b1c6f6ae1ac3b93cd3d5fd001e0bc21
```

```
$ openssl verify -CAfile CA-root.crt CA-intermediate.crt  
CA-intermediate.crt: OK
```


Create a Server/Leaf Certificate

```
$ openssl req -new -nodes -subj "/CN=$(hostname)" -text -keyout server.key > server.csr
```


```
$ # This is an leaf so don't use the "v3_ca" extension.
```

```
$ openssl x509 -req -in server.csr -text -days 913 \  
    -CA CA-intermediate.crt -CAkey CA-intermediate.key \  
    -CAcreateserial > server.crt
```


3.4 Certificate Hierarchies: Our Simplistic Configuration




Root Signs Server and Client Certificates

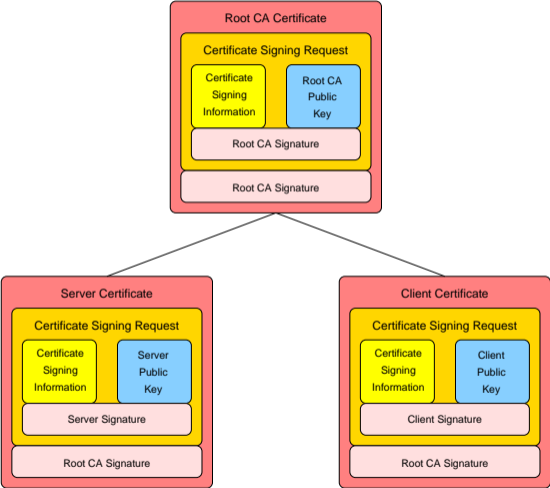


Intermediate Signs Server and Client Certificates

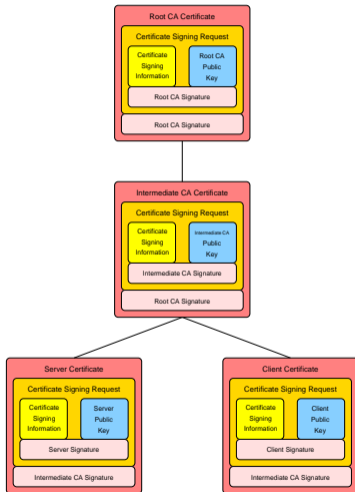

Intermediate Signs Client

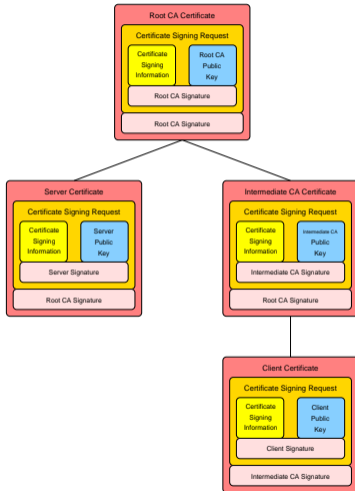

Separate Server/Client Intermediates

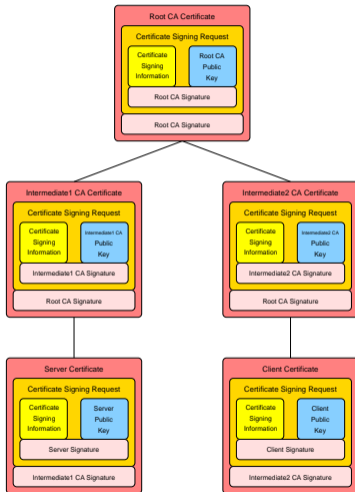

3.5 Certificate Tips with Your Own Root CA

- Create a root certificate (root CA) signed by its own password-protected key pair
- Create an intermediate CA whose certificate is signed by the root CA's private key
- Transfer the root CA's private key to offline storage
- Use the intermediate certificate to sign leaf certificates
- Append the intermediate certificate when sending the leaf certificate
- Use the root certificate when validating remote certificates
- Because remotes verify using only a root certificate, intermediate and leaf certificates can be replaced incrementally
- For more details see <https://github.com/ssllabs/research/wiki/SSL-and-TLS-Deployment-Best-Practices>

3.6 Certificate Revocation List (CRL)

A certificate revocation list (CRL) records non-expired certificates that should no longer be trusted due to:

- Unauthorized exposure of a certificate's private key (certificates are public)
- Device containing the certificate's private key was or is not under trusted control
- Departure of staff that had access to the certificate's private key


While not required for initial security, it is best to configure CRL files and their distribution method during certificate installation (even if the CRLs are empty) so they are ready when needed.

3.7 TLS Use of Certificates


The two parties communicating via TLS generate a shared secret key, usually via Diffie–Hellman. The certificate owner proves they are on the other end of the TLS connection by signing the shared secret using the private key matching the certificate’s public key.

While both parties contribute to the shared secret, neither side fully controls the result. This prevents a man in the middle from impersonating the certificate owner by creating a new TLS connection with an identical shared secret and resending the signed shared secret it received from the real certificate owner.

Sending Certificate and TLS Signature

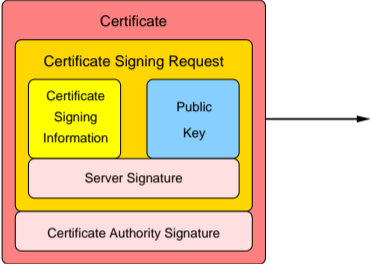

TLS Parameters
with Shared Secret

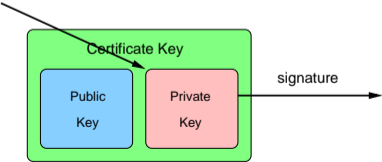

4. Browser Certificate Usage



<https://www.flickr.com/photos/12227067@N02/>

The *momjian.us* TLS Certificate



General Details

This certificate has been verified for the following uses:

- SSL Client Certificate
- SSL Server Certificate

Issued To

Common Name (CN)	momjian.us
Organization (O)	<Not Part Of Certificate>
Organizational Unit (OU)	<Not Part Of Certificate>
Serial Number	23:30:40:E9:4C:3E:B1:63:4E:15:2B:1A:E2:00:A1:01

Issued By

Common Name (CN)	RapidSSL SHA256 CA
Organization (O)	GeoTrust Inc.
Organizational Unit (OU)	<Not Part Of Certificate>


Period of Validity

Begins On	March 2, 2016
Expires On	May 2, 2018

Fingerprints

SHA-256 Fingerprint	80:5D:21:92:56:BE:16:43:5F:0F:3A:23:9C:DD:E8:96: A8:63:F7:7B:72:84:3D:06:E8:86:4D:0C:47:2C:4B:4C
SHA1 Fingerprint	2A:26:28:17:34:9A:BA:A2:5E:75:6E:E2:9E:F0:6F:91:B4:78:28:C3

Certificate Chain to a Trusted Certificate Authority

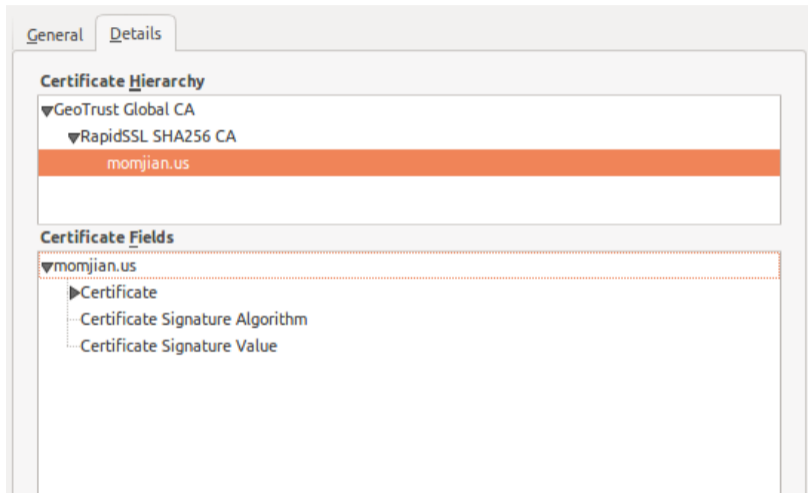

Trusted Certificates

Your Certificates	People	Servers	Authorities	Others
You have certificates on file that identify these certificate authorities:				
Certificate Name	Security Device			
GeoTrust Global CA	Builtin Object Token			
GeoTrust Primary Certification Authority - G2	Builtin Object Token			
GeoTrust Primary Certification Authority - G3	Builtin Object Token			
GeoTrust Primary Certification Authority	Builtin Object Token			
GeoTrust Universal CA	Builtin Object Token			
GeoTrust Universal CA 2	Builtin Object Token			
RapidSSL SHA256 CA - G2	Software Security Device			
GeoTrust SSL CA - G3	Software Security Device			
GeoTrust DV SSL CA	Software Security Device			
RapidSSL SHA256 CA	Software Security Device			
GeoTrust Extended Validation SHA256 SSL CA	Software Security Device			
GeoTrust SSL CA - G4	Software Security Device			
GeoTrust DV SSL SHA256 CA	Software Security Device			
GeoTrust EV SSL CA - G4	Software Security Device			
GeoTrust DV SSL CA - G3	Software Security Device			
RapidSSL SHA256 CA - G4	Software Security Device			

Firefox trusted certificate authorities are at <https://ccadb-public.secure.force.com/mozilla/CACertificatesInFirefoxReport>.

Chrome does not include RapidSSL certificates so, for compatibility, the *momjian.us* web server must send the RapidSSL intermediate certificate to clients.

Removal of *Geotrust Global CA* Prevents Certificate Validation



Your connection is not secure

The owner of momjian.us has configured their website improperly. To protect your information from being stolen, Firefox has not connected to this website.

[Learn more...](#)

Go Back

Advanced

Report errors like this to help Mozilla identify and block malicious sites

momjian.us uses an invalid security certificate.


The certificate is not trusted because the issuer certificate is unknown.
The server might not be sending the appropriate intermediate certificates.
An additional root certificate may need to be imported.

Error code: `SEC_ERROR_UNKNOWN_ISSUER`

Add Exception...

News report of a root certificate being distrusted: <https://www.bleepingcomputer.com/news/security/google-outlines-ssl-apocalypse-for-symantec-certificates/>

5. Postgres Certificate Usage

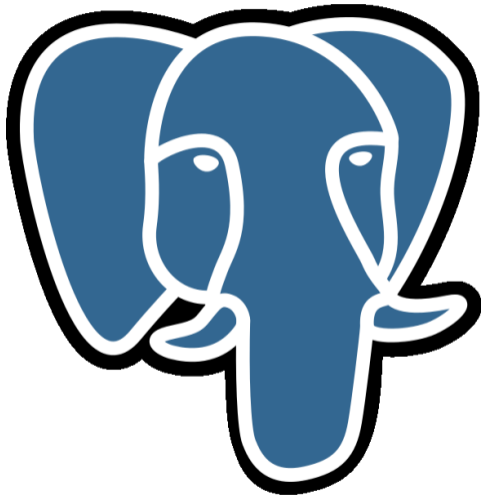

https://momjian.us/main/blogs/pgblog/2017.html#January_9_2017

Getting the Postgres Server Certificate

```
$ # https://github.com/thusoy/postgres-mitm (by Tarjei Husøy, uses Python)
$ wget https://github.com/thusoy/postgres-mitm/archive/master.zip
$ unzip master.zip
$ cd postgres-mitm-master/
$ # This returns the server certificate, not the entire chain.
$ postgres_get_server_cert.py $(hostname) | openssl x509 -text -noout
Certificate:
```

Data:

Version: 1 (0x0)

Serial Number:

90:b1:e0:3f:72:fb:65:8c

Signature Algorithm: sha256WithRSAEncryption

Issuer: CN=CA-intermediate

Validity

Not Before: May 3 01:47:21 2017 GMT

Not After : May 1 01:47:21 2027 GMT

Subject: CN=momjian.us

...

openssl s_client cannot be used because Postgres requires custom protocol messages before switching to SSL mode.

Enabling Certificate Authentication

To verify server authenticity, the Postgres client must enable checking of the server certificate by using connection options `sslmode=verify-ca` or `sslmode=verify-full`. The later verifies the server certificate's subject name matches the server's host name. For example, this authenticates the server certificate (but not the subject name):

```
psql "sslmode=verify-ca host=localhost dbname=postgres"
```


I specified the host name (`localhost`) because SSL is not supported on Unix domain sockets, which is the default connection type on Unix-like platforms.

Private Root CAs

Postgres usually uses private CAs because servers and clients are typically part of the same organization. (Using a public CA provides little value and adds another party that must be trusted.) Therefore, to enable authentication, the Postgres client must store a trusted root certificate, e.g:

```
$ cp root.crt ~postgres/.postgresql/root.crt
```

Certificate Validation

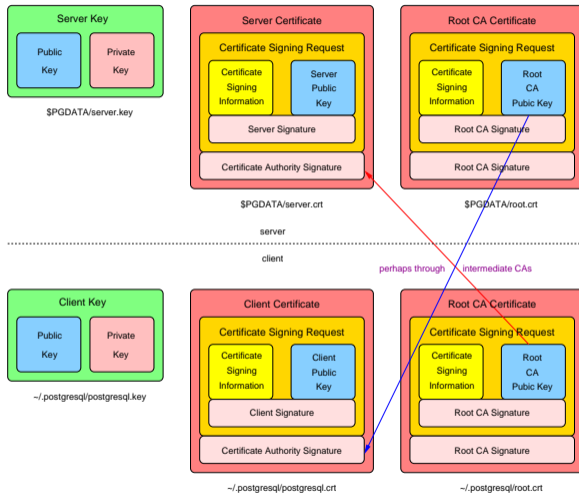

https://momjian.us/main/blogs/pgblog/2017.html#January_17_2017

Server Certificate with Intermediate and Leaf

Using the previously-created certificates and using:

```
$ cat server.crt CA-intermediate.crt > $PGDATA/server.crt
```

These `client root.crt` contents allow connections:

- CA-root.crt (the server provides the intermediate and leaf)
- CA-intermediate.crt CA-root.crt (the client intermediate is ignored)
- CA-root.crt CA-intermediate.crt (the order of certificates in root.crt doesn't matter)
- CA-root.crt CA-intermediate.crt server.crt (extra client certificates are ignored)

and these fail because no root certificate is stored on the client:

- CA-intermediate.crt
- server.crt
- server.crt CA-intermediate.crt
- CA-intermediate.crt server.crt

Server Certificate With Only Leaf

If we store only the server certificate on the server:

```
$ cat server.crt > $PGDATA/server.crt
```

These `client root.crt` contents allow connections:

- CA-intermediate.crt CA-root.crt (the client must supply the intermediate)
- CA-root.crt CA-intermediate.crt (order doesn't matter here)
- CA-root.crt CA-intermediate.crt server.crt (the client ignores server.crt)

and these fail because the root or intermediate certificates are missing:

- CA-root.crt
- CA-intermediate.crt
- server.crt
- server.crt CA-intermediate.crt
- CA-intermediate.crt server.crt

The First Certificate in `server.crt` Is Special

If we store the intermediate certificate first on the server:

```
$ cat CA-intermediate.crt server.crt > $PGDATA/server.crt
```

the server will not start:

```
FATAL: could not load private key file "server.key":  
key values mismatch
```

The first certificate in `server.crt` must match the keys in `$PGDATA/server.key`. Additional stored certificates should be appended in reverse-signing order (for compatibility).

Certificate Revocation List (CRL) Testing

```
$ cp CA-root.crt ~postgres/.postgresql/root.crt  
$ sql "sslmode=verify-ca host=$(hostname) dbname=postgres"  
psql: SSL error: certificate verify failed
```

```
$ cp CA-intermediate.crt ~postgres/.postgresql/root.crt  
$ sql "sslmode=verify-ca host=$(hostname) dbname=postgres"  
psql: SSL error: certificate verify failed
```

```
$ cp server.crt ~postgres/.postgresql/root.crt  
$ sql "sslmode=verify-ca host=$(hostname) dbname=postgres"  
psql: SSL error: certificate verify failed
```

Multiple revoked certificates can be appended to the file.

Client Certificates

Placing certificates on Postgres clients has advantages:

- Servers can validate client certificates by:
 - installing certificates on clients that are signed by a certificate authority the server trusts
 - installing trusted root certificates on the server by specifying `ssl_ca_file` in `$PGDATA/postgresql.conf`
 - adding `clientcert=verifyca` or `clientcert=verifyfull` to `hostssl` lines in `pg_hba.conf`
- Clients can even authenticate database user names to servers by setting the certificate subject name

6. Conclusion: What Cryptography Can Accomplish

Authenticity Verify who is on the other end of the communication channel (X.509, RSA)

Confidentiality Only the other party can read the original messages (ECDHE, AES)

Integrity No other party can change or add messages (GCM, SHA)

Conclusion



<https://momjian.us/presentations>

<https://www.flickr.com/photos/cyberhades/>